


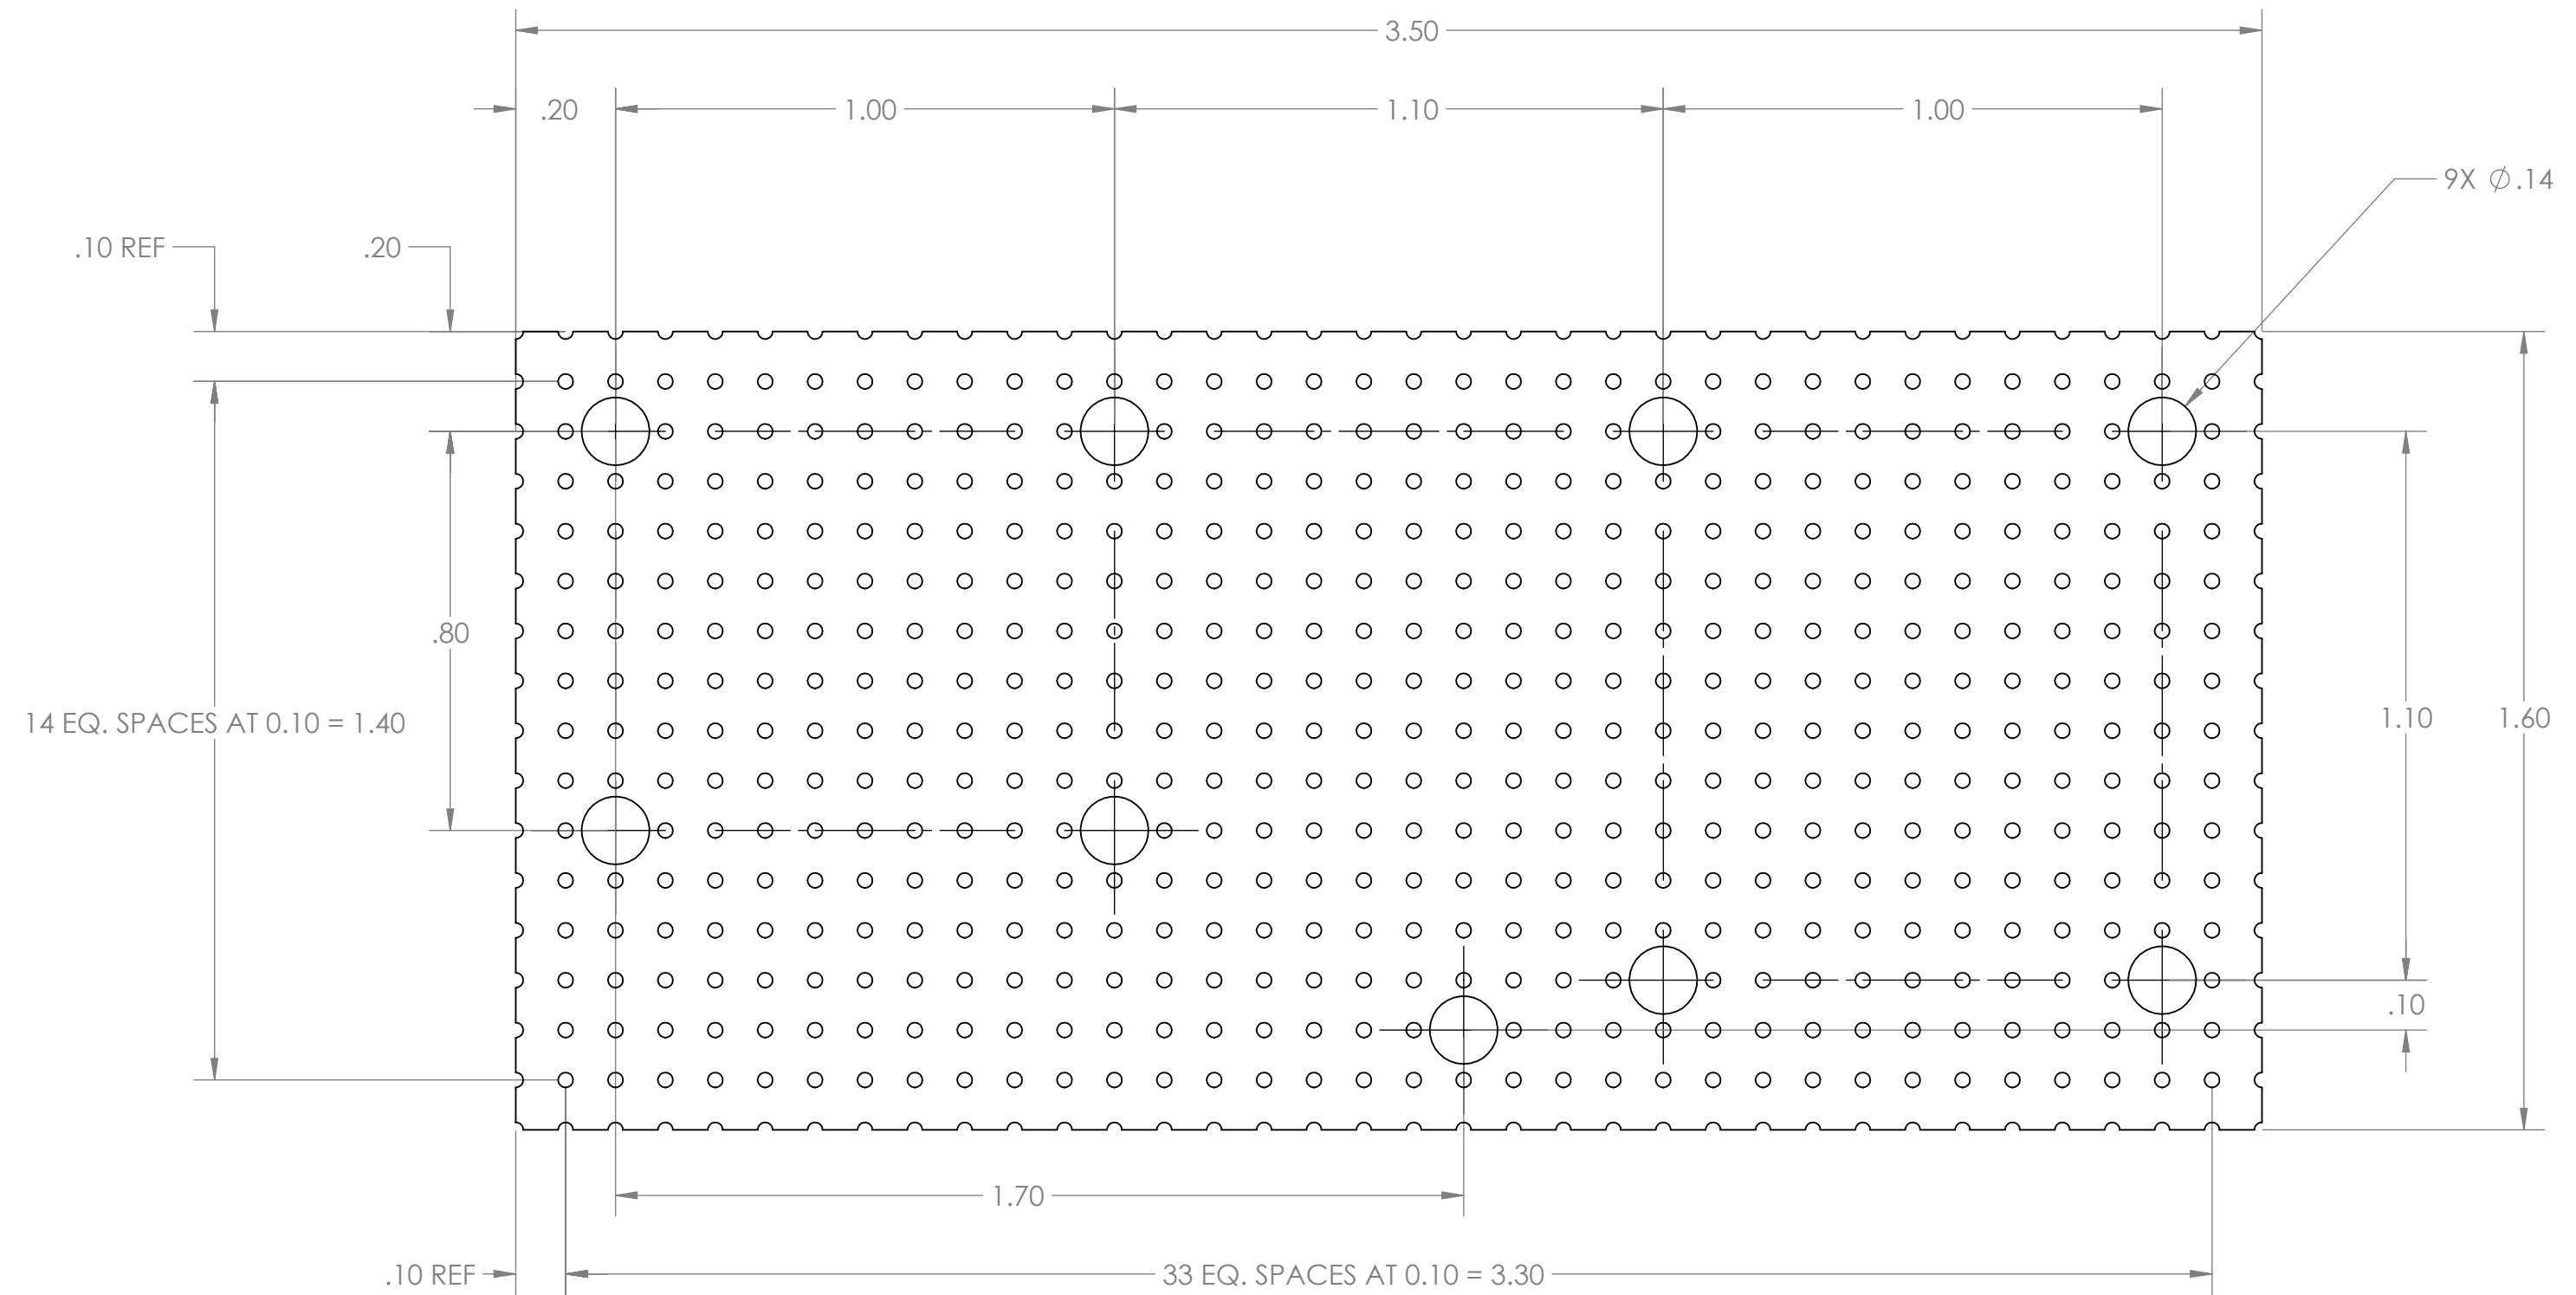

- NOTE:
1. PERF BOARD SHOULD BE 0.1" PITCH. PLATED THROUGH HOLES ARE PREFERRED TO ALLOW BACK TO FRONT BOARD CONNECTIONS.
 2. ALL MOUNTING HOLES ARE DRILLED AT LOCATIONS OF EXISTING THROUGH HOLES TO MATCH 0.1" PITCH PATTERN. HOLE PATTERN CAN BE USED TO LOCATE DRILL POSITIONS.

RASPBMO CONTROLLER PCB